




Solar AC Distribution Box

AC 400V / 20 & 40A

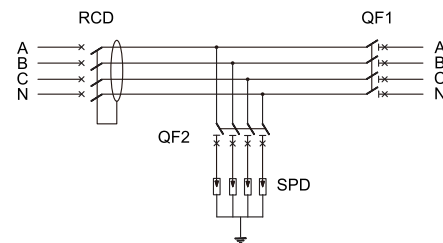

Projoy AC distribution Boxes For C&I Rooftop PV plants (≥ 30kW)

General Data			AC SPD	
Model No.	PEDB-T10	PEDB-T20	Nominal Voltage	440 VAC
Nominal Voltage	400 VAC	400 VAC	Max. Discharge Current	40 kA
Nominal Current	20 A	40 A	Poles	4P
			Certification	CE, CB
Enclosure			AC RCCB	
Material Type	Polycarbonate/ABS		Poles	4P
Ingress Protection Rating	IP65		Nominal Current	40A
Degree of Resistance to Impacts	IK10		Nominal Voltage	400V
Poles	18P		Type	AC(A Optional)
Cable Input Entry	Cable Gland ∅ 4-8mm or MC4		Nominal Voltage	30mA(100mA/300mA Optional)
Cable Output Entry	Cable Gland ∅ 4-8mm or MC4		Type	CE, CB
AC MCB			Environment	
Poles	4P		Operating Temperature	-20 ℃ ~+60 ℃
Nominal Current	20 A	40 A	Humidity	99%
Nominal Voltage	400 VAC		Altitude	2000M
Breaking Capacity	6 kA		Installation	Wall Mounting
Certification	TUV, SAA, CE, CB			

Projoy Electric Co., Ltd.

Add: 2nd Floor, Building 3, No. 2266, Taiyang Road, Xiangcheng District, Suzhou, China

Web: en.projoy-electric.com

Tel: +86-512-6878 6489

Email: sales@projoy-electric.com